

## Series 3070-T

### Specifications:

AAMA/WDMA/CSA/IS101/A440-08 CSA A440S1-09 (Non-Impact)  
TAS 201,202,203 ([FL-15560](#), HVHZ)  
ASTM 1886e/1996e ([FL-15560](#), Impact Non-HVHZ)

### Frame:

- DP +50.0/-55.0 PSF
- Straight, Pocket, Corner and Multi-Corner configurations
- No TDL bars inside a vent
- Sub Sillpan frame option
- Archetype and Archetype Narrow  
(Double actuator required with Archetype Narrow on corner configurations)
- Reverse HP Interlocker at the Pocket (allows HP stiles to pocket flush)

Unlimited frame width

Any combination of fixed and operable panels is allowed

### Straight configuration:

- **Frame heights <= 120"**: ([FL-15560.21](#), HVHZ) ([FL-15560.22](#), HVHZ)  
([FL-15560.23](#), Non-Impact) ([FL-15560.24](#), Non-Impact)  
G2 glass type: DP +50.0/-55.0 PSF: Maximum panel size = 62.06" x 118.0"  
G1 glass type: DP +50.0/-55.0 PSF: Maximum panel size = 62.06" x 118.0"

### Corner/Multi-Corner configuration:

- **Frame heights <= 120"**; **90°- 135°** , : ([FL-15560.22](#), HVHZ) ([FL-15560.24](#), Non-Impact)  
G2 glass type: DP +50.0/-55.0 PSF: Maximum panel size = 62.06" x 118.0"  
G1 glass type: DP +50.0/-55.0 PSF: Maximum panel size = 62.06" x 118.0"

### Glazing Options:

G2: HVHZ / Impact Non-HVHZ:

1": 5mm-T, space, 5mm-HS/.090 SGP/5mm-HS


1": 6mm-T, space, 4mm-HS/.090 SGP/4mm-HS

G1: Non-Impact:

1" IG: 6mm-T/space/6mm-T

**Series 3070-T**

Sample Illustration: **Straight Configuration (Pocket or Non-Pocket)**

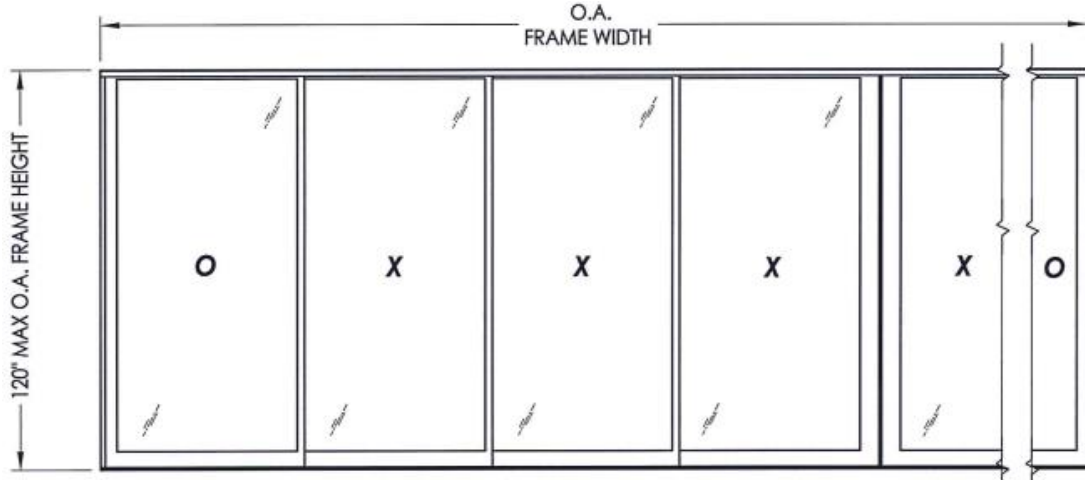

Sample Illustration: **Corner/ Multi-Corner Configuration**

